

Material Needed.



Vacuum.



Double bucket with drain plug.



Microfibre mop.



Warm water.



Stiff brush
(with medium strength bristles).



Jontec Forward.



Jontec Tensol.

OPTIONAL



Scrubber drier.

White contact pad
(for post-installation
& daily cleaning).

Red contact pad
(for deep cleaning).

Post-installation.

Only one time,
immediately
after installation
and before
first use of the
flooring.


1



Vacuum the
area.

2

Using bucket #1,
dilute 50 ml of
Jontec Forward
for each liter
of solution
(1 L ~ 15 m²).



3

Apply solution
with microfibre
mop. Drain in
bucket #2
before use.




4



Wait ~ 10 min.
Don't allow it to dry.

5

Fill bucket #1 with clean
warm water and rinse
using a different mop.
Drain in bucket #2
before use. Change
the water frequently
to remove dirt.

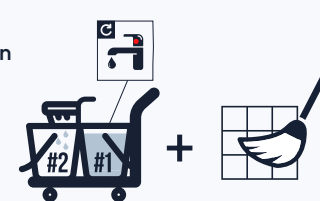

6



Leave to dry
completely.

For best results,
dry thoroughly with
a clean, dry mop.

● The Scrubber drier can be used for these steps.

The floor must be covered during all building works and kept covered until ready to be cleaned and used.

Daily Cleaning.

For daily
cleaning.


1



Vacuum the area.

2

Using bucket #1,
dilute 25 ml of
Jontec Tensol
for each liter
of solution
(1 L ~ 25 m²).




3

Apply solution
with microfibre
mop. Drain in
bucket #2
before use.



4

Fill bucket #1 with clean
warm water and rinse
using a different mop.
Drain in bucket #2
before use. Change
the water frequently
to remove dirt.

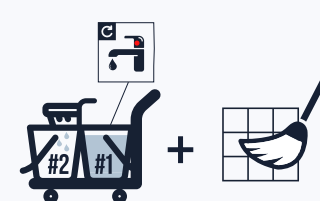

5



Leave to dry
completely.

For best results,
dry thoroughly with
a clean, dry mop.

● The Scrubber drier can be used for these steps.

Deep Cleaning.*

For intensive
cleaning.**


1



Vacuum the
area.

2

Using bucket #1,
dilute 200 ml of
Jontec Forward
for each liter
of solution
(1 L ~ 15 m²).



3

Apply the
solution using
a microfibre
mop.



4



Wait
2-5 minutes.
Do not allow the
surface to dry.

5



Scrub the
solution with
a brush.
Do not allow
it to dry.

6

Fill bucket #1 with clean
warm water and rinse
using a different mop.
Drain in bucket #2
before use. Change
the water frequently
to remove dirt.



7



Leave to dry
completely.

For best results,
dry thoroughly with
a clean, dry mop.

● The Scrubber drier can be used for these steps.

Material Needed.						OPTIONAL	
	Vacuum the area.	Bucket.	Stiff brush (with medium strength bristles).	Warm water	Tapi Shampoo.	Turf Cleaner.	

PAVIGYM Turf.							
Deep cleaning.*	1	2		3	4	5	
		100ml Tapi Shampoo for each liter of solution (1 L ~ 40m²).					
*Vacumm for weekly cleaning.	Vacuum the area.			Scrub the solution.	Leave to dry completely.	Vacuum the area.	

● The Turf cleaner can be used for these steps.

PAVIGYM & DUPLEX MACHINE CLEANING MANUAL

Material Needed.



Vacuum.



Warm water.



Jontec Forward.



Jontec Tensol.





Duplex Floor Scrubber.

Initial Setup.

1

Ensure that the handle is in the rest position (completely vertical) and that the RT regulator is set to the "TRANSPORT/REST" position to be able to move the machine.

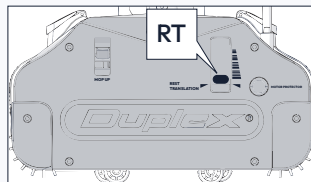


2

Depending on the type of machine, plug the cable into a grounded socket or ensure that the battery is fully charged and connected properly.



3


Turn on the machine by pressing the red main switch on the handle.



Adjusting the Settings.

1


The RT regulator has 5 positions. To clean, always select one of the working levels (1-4), and adjust according to the type of floor and the level of dirt.

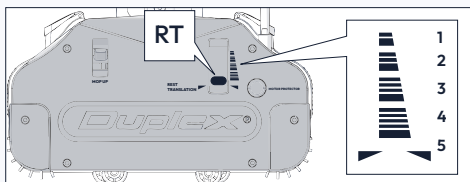

- 1 Heavy duty wash for very dirty floors.
- 2 Delicate wash for all types of floors.
- 3 Normal carpets and wooden floors.
- 4 Long-pile carpets.
- 5 Transport position / disable appliance (REST TRASLATION)

3

Grip the handle and press the yellow safety lever. Slowly lower the handle to one side. The machine will start, and the revolving brushes will begin to work on the floor.




2

The MOP-UP switch has 2 options:

- **Down:** scrubs and picks up simultaneously.
- **Up:** scrubs only, no pickup ((ideal for persistent stains).


We recommend using the "Down" position for all cleaning types.

For persistent stains, place the MOP-UP lever in the "Up" position to scrub without recovery, allowing the detergent to act longer on the floor. After completing one run, stop the machine and switch the lever down again.

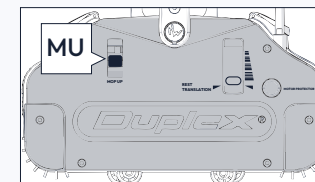




Move the MOP-UP lever only when the machine is stopped.
To perform a deep cleaning on other types of flooring such as carpets, wooden floors, etc. please contact the flooring manufacturer

Using the Machine.



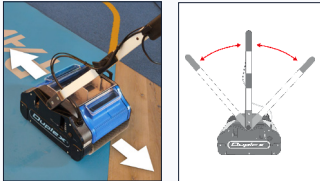
1 Move the machine slowly forward, retracing the same cleaning path with the recovery device (MOP-UP) enabled. The reversible handle makes operation easy in both directions. 	2 While moving forward, dispense the cleaning solution by activating the lever under the handle at short intervals. Avoid flooding the floor and adjust the amount to the level of dirt. 	3 When in use, the dirty water is immediately collected in the recovery tank, which must be emptied as soon as it is full by removing it from its seat. 
--	---	--

Cleaning Types.




Post-Installation Cleaning (One-time cleaning, immediately after installation) .

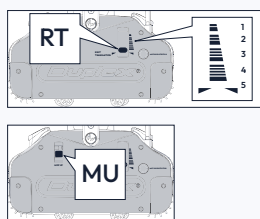1  Vacuum the area.	2 Fill both side tanks with 50 ml Jontec Forward for each liter of solution. Leave the central tank empty to collect waste water. 	3 Adjust the settings according to the instructions above.  	4 Start cleaning following the instructions above."  	5  Allow the surface to dry completely.
--	---	--	--	---

Daily Cleaning.

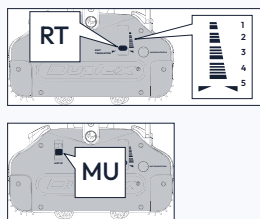1  Vacuum the area.	2 Fill both side tanks with 25 ml Jontec Tensol for each liter of solution. Leave the central tank empty to collect waste water. 	3 Adjust the settings according to the instructions above.  	4 Start cleaning following the instructions above."  	5  Allow the surface to dry completely.
---	---	--	--	--

Deep Cleaning.

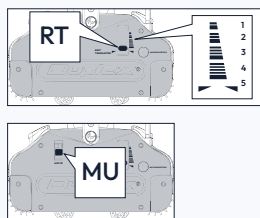1  Vacuum the area.	2 Fill both side tanks with 200ml Jontec Forward for each liter of solution. Leave the central tank empty to collect waste water. 	3 Adjust the settings according to the instructions above.  	4 Start cleaning following the instructions above."  	5  Allow the surface to dry completely.
--	---	--	--	---

! The machine must be cleaned thoroughly after each use (roller brush, tanks emptied, rinsed, and drained).